


PLYCO

RIDGE CAP VENTILATOR

MW-RCV-9
CONTINUOUS PERFORATED
ASSEMBLY FOR RIDGE
CAP VENTILATION

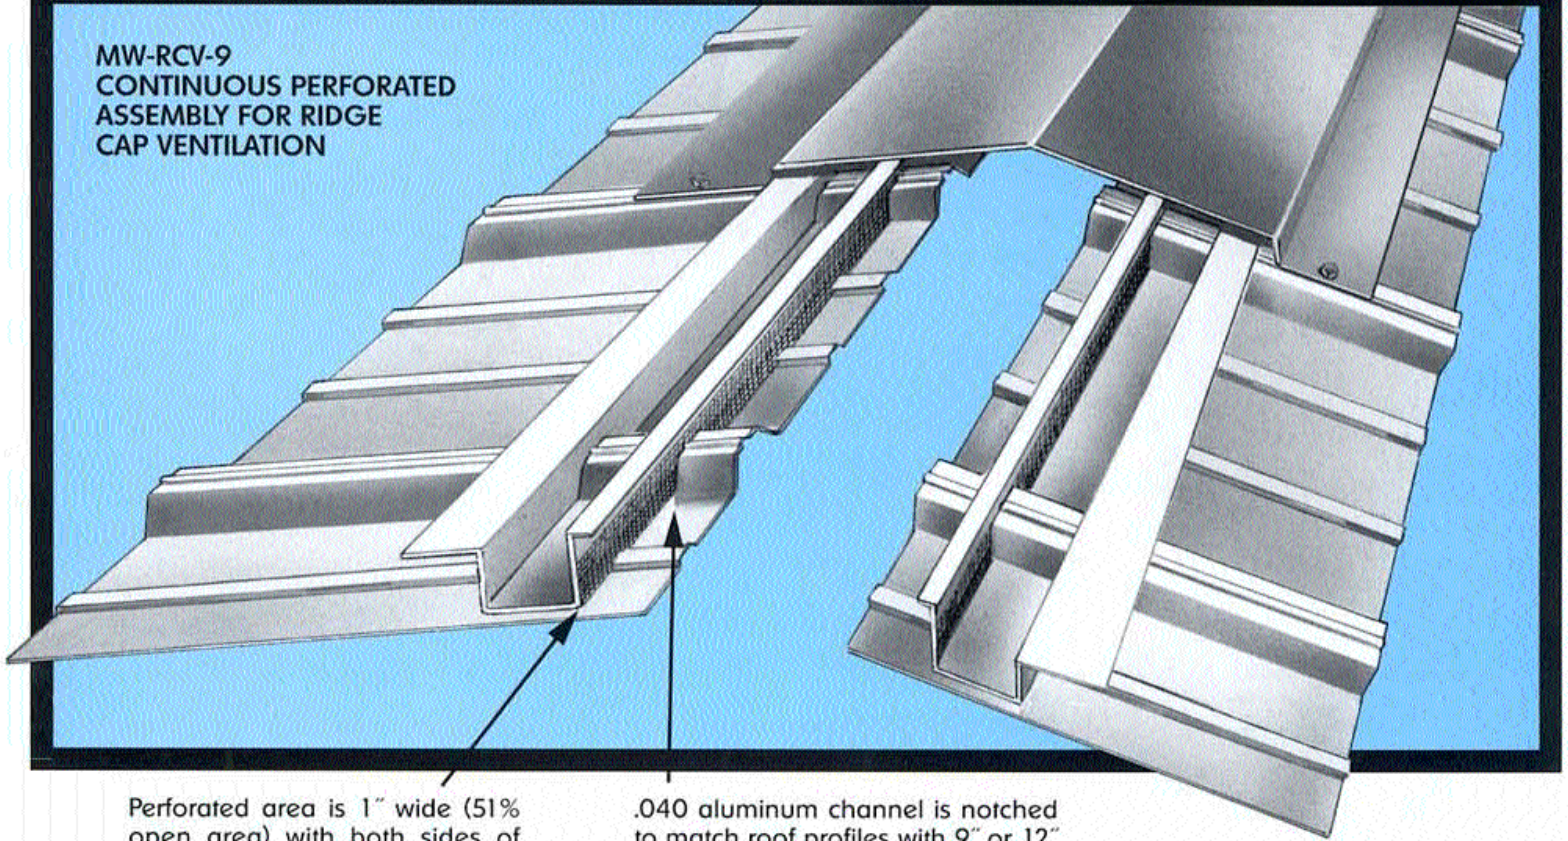


Perforated area is 1" wide (51% open area) with both sides of ridge using channel - this equals 12 sq. in./lin. ft.

.040 aluminum channel is notched to match roof profiles with 9" or 12" rib spacings.

(Allows 12 sq. in. of free area per lineal foot of ridge for ventilation)


Where heavy snow conditions prevail - Optional 12" wide filter material

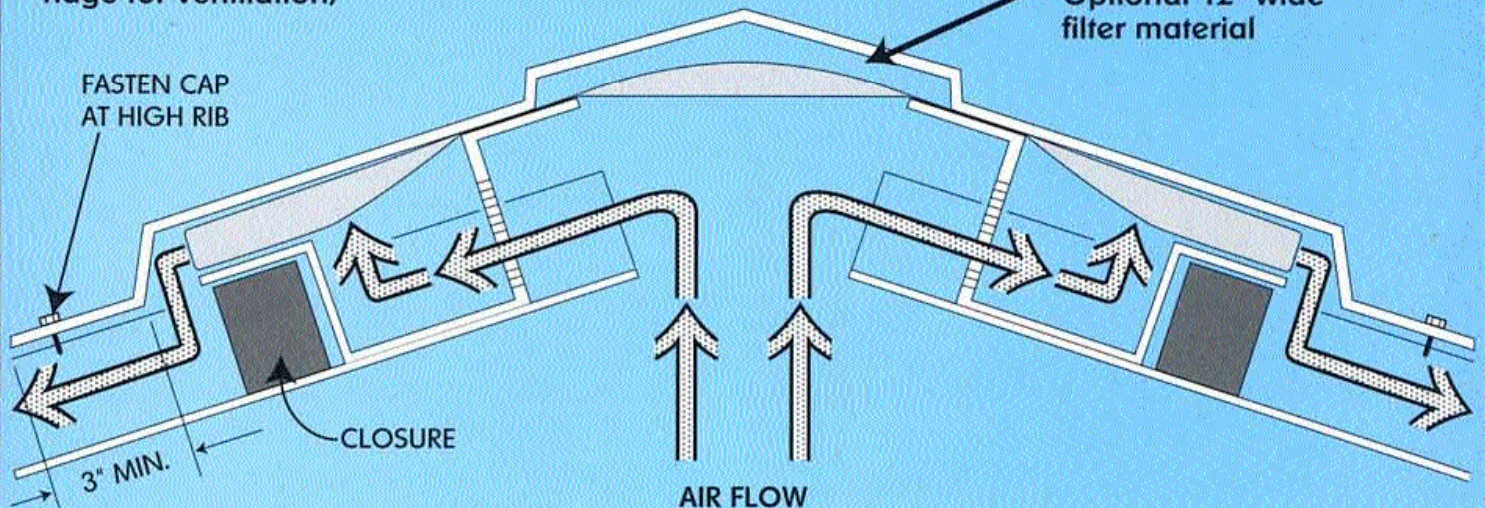

RIDGE CAP VENTILATOR


Four Styles Available To Allow
For Intermediate Offsets In Ridge Cap

- LOW PROFILE
- 6'0" LONG TO COVER (2) 36" ROOF PANELS
- CREATES 1/2" AIR SPACE ON EACH SIDE OF RIDGE CAP
- USES STANDARD RIDGE CAP
- NOTCHED ON 9" CENTERS TO FIT OVER RIBS OF STEEL
- FABRICATED FROM .040 ALUMINUM - NEVER RUSTS!
- NOTCHED ON 12" CENTERS IF REQUESTED

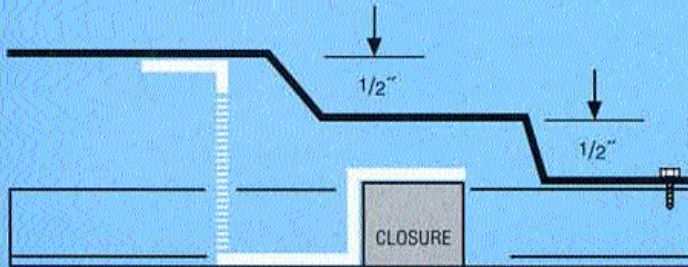


MW-RCV-9-50

Notched on 9" centers. Allows for up to 1/2" intermediate offset in ridge cap (1 7/8" high to fastening point).

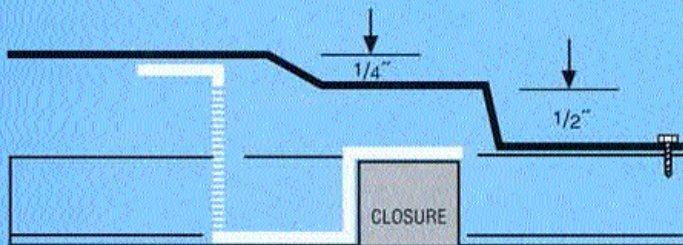

MW-RCV-9-25

Notched on 9" centers. Allows for up to 1/4" intermediate offset in ridge cap (1 5/8" high to fastening point).

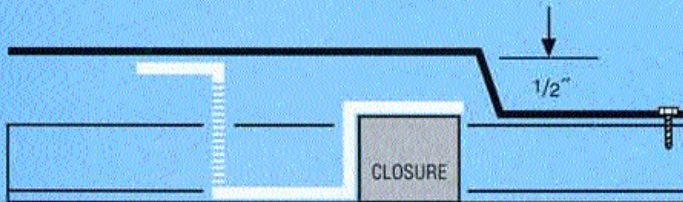


MW-RCV-9-A & B

Is used with flat ridge cap (1 3/8" high to fastening point).

(MW-RCV-9-A will adapt to typical 3/4" high 9" O.C. roof panel) e.g. McElroy MAX Rib or similar.

(MW-RCV-9-B will adapt to Granite City Power Panel or Wheeling CD 2000).

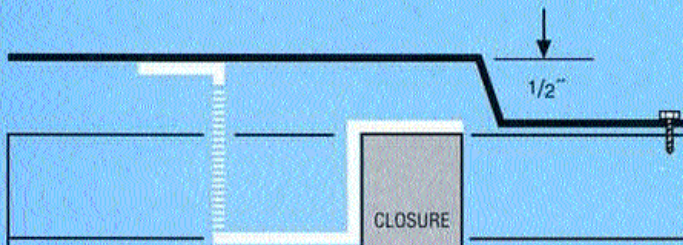

MW-RCV-9-F

Is used where closure is desired on uphill side of RCV (shown with "J" trim) e.g. Fabral Grand Rib 3 with AR3P ridge cap detail.

PLYCO
CORPORATION

Elkhart Lake, WI 53020

USA 800-558-5895
INTERNATIONAL 920-876-3611
Fax 800-257-5926 Fax 920-876-3527

Distributed by: